

# SN65C189, SN65C189A, SN75C189, SN75C189A QUADRUPLE LOW-POWER LINE RECEIVERS

SLLS041D – OCTOBER 1988 – REVISED MAY 1995

- Meets or Exceeds the Requirements of ANSI EIA/TIA-232-E and ITU Recommendation V.28
- Low Supply Current . . . 420  $\mu$ A Typ
- Preset On-Chip Input Noise Filter
- Built-in Input Hysteresis
- Response and Threshold Control Inputs
- Push-Pull Outputs
- Functionally Interchangeable and Pin Compatible With Texas Instruments SN75189/SN75189A, Motorola MC1489/MC1489A, and National Semiconductor DS14C88A

## description

The SN65C189, SN65C189A, SN75C189, and SN75C189A are low-power bipolar quadruple line receivers that are used to interface data terminal equipment (DTE) with data circuit-terminating equipment (DCE). These devices have been designed to conform with ANSI Standard EIA/TIA-232-E.


The SN65C189 and SN75C189 have a 0.33 V typical hysteresis compared with 0.97 V for the SN65C189A and SN75C189A. Each receiver has provision for adjustment of the overall input threshold levels. This is achieved by choosing external series resistors and voltages to provide bias levels for the response control pins. The output is in the high logic state if the input is left open circuited or shorted to ground.

These devices have an on-chip filter that rejects input pulses of shorter than 1- $\mu$ s minimum duration. An external capacitor may be connected from the control pins to ground to provide further input noise filtering for each receiver.

The SN65C189, SN75C189, SN65C189A, and SN75C189A have been designed using low-power techniques in a bipolar technology. In most applications, these receivers will interface to single inputs of peripheral devices such as UARTs, ACEs, or microprocessors. By using sampling, such peripheral devices are usually insensitive to the transition times of the input signals. If this is not the case or for other uses, it is recommended that the SN65C189, SN75C189, SN65C189A, and SN75C189A outputs be buffered by single Schmitt input gates or single gates of the HCMOS, ALS, or 74F logic families.


The SN65C189 and SN65C189A are characterized for operation from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . The SN75C189 and SN75C189A are characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

D, DB $\dagger$ , N, OR NS $\dagger$  PACKAGE  
(TOP VIEW)




$\dagger$  The DB and NS packages are only available left-end taped and reeled, i.e., order SN75C189ADBLE or SN75C189ANSLE.

## logic symbol $\ddagger$

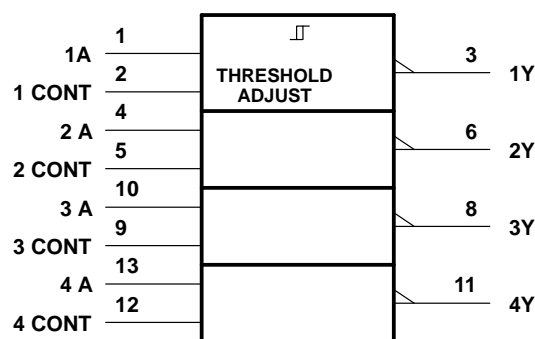

$\ddagger$  This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.


## logic diagram (each receiver)



# SN65C189, SN65C189A, SN75C189, SN75C189A QUADRUPLE LOW-POWER LINE RECEIVERS

SLLS041D – OCTOBER 1988 – REVISED MAY 1995

## schematic of inputs and outputs

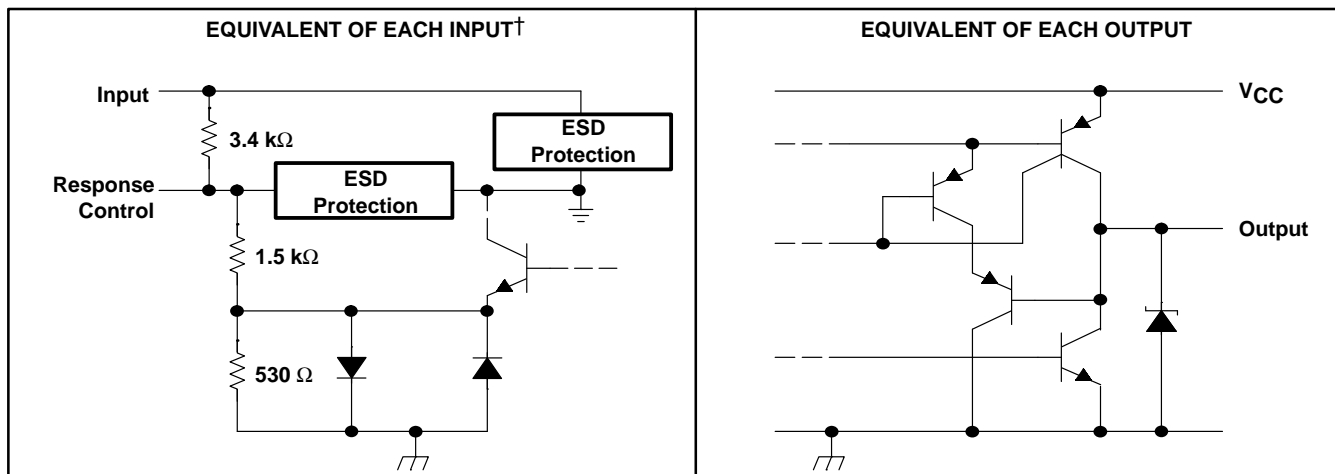

† All resistor values shown are nominal.

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

|  |                                   |
|--|-----------------------------------|
| Supply voltage, V <sub>CC</sub> (see Note 1)                 | 7 V                               |
| Input voltage range, V <sub>I</sub>                          | -30 V to 30 V                     |
| Output voltage range, V <sub>O</sub>                         | -0.3 V to V <sub>CC</sub> + 0.3 V |
| Continuous total dissipation                                 | See Dissipation Rating Table      |
| Operating free-air temperature range, T <sub>A</sub> :       |                                   |
| SN65C189, SN65C189A  | -40°C to 85°C                     |
| SN75C189, SN75C189A  | 0°C to 70°C                       |
| Storage temperature range, T <sub>stg</sub>                  | -65°C to 150°C                    |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C                             |

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltages are with respect to the network ground terminal.

DISSIPATION RATING TABLE

| PACKAGE | T <sub>A</sub> = 25°C<br>POWER RATING | DERATING FACTOR<br>ABOVE T <sub>A</sub> = 25°C | T <sub>A</sub> = 70°C<br>POWER RATING | T <sub>A</sub> = 85°C<br>POWER RATING |
|---------|---------------------------------------|--|---------------------------------------|---------------------------------------|
| D       | 950 mW                                | 7.6 mW/°C                                      | 608 mW                                | 494 mW                                |
| DB      | 525 mW                                | 4.2 mW/°C                                      | 336 mW                                | 273 mW                                |
| N       | 1150 mW                               | 9.2 mW/°C                                      | 736 mW                                | 598 mW                                |
| NS      | 500 mW                                | 4.0 mW/°C                                      | 320 mW                                | 260 mW                                |

# SN65C189, SN65C189A, SN75C189, SN75C189A QUADRUPLE LOW-POWER LINE RECEIVERS

SLLS041D – OCTOBER 1988 – REVISED MAY 1995

## recommended operating conditions

|                                       |                     | MIN | NOM | MAX     | UNIT |
|---------------------------------------|---------------------|-----|-----|---------|------|
| Supply voltage, $V_{CC}$              |                     | 4.5 | 5   | 6       | V    |
| Input voltage, $V_I$ (see Note 2)     |                     | -25 |     | 25      | V    |
| High-level output current, $I_{OH}$   |                     |     |     | -3.2    | mA   |
| Low-level output current, $I_{OL}$    |                     |     |     | 3.2     | mA   |
| Response control current              |                     |     |     | $\pm 1$ | mA   |
| Operating free-air temperature, $T_A$ | SN65C189, SN65C189A | -40 |     | 85      | °C   |
|                                       | SN75C189, SN75C189A | 0   |     | 70      |      |

NOTE 2: The algebraic convention, where the more positive (less negative) limit is designated as maximum, is used in this data sheet for logic levels only, e.g., if -10 V is a maximum, the typical value is a more negative voltage.

## electrical characteristics over recommended free-air temperature range, $V_{CC} = 5\text{ V} \pm 10\%$ (unless otherwise noted) (see Note 3)

| PARAMETER |  | TEST CONDITIONS   |              | MIN                  | TYP†  | MAX  | UNIT          |
|-----------|--|---|--------------|----------------------|-------|------|---------------|
| $V_{IT+}$ | Positive-going input threshold voltage           | °C189   | See Figure 1 | 1                    |       | 1.5  | V             |
|           |  |   |              | °C189A               | 1.6   |      |               |
| $V_{IT-}$ | Negative-going input threshold voltage           | °C189   | See Figure 1 | 0.75                 |       | 1.25 | V             |
|           |  |   |              | °C189A               | 0.75  | 1    |               |
| $V_{hys}$ | Input hysteresis voltage ( $V_{IT+} - V_{IT-}$ ) | °C189   | See Figure 1 | 0.15                 | 0.33  |      | V             |
|           |  |   |              | °C189A               | 0.65  | 0.97 |               |
| $V_{OH}$  | High-level output voltage                        | $V_{CC} = 4.5\text{ V to }6\text{ V}, V_I = 0.75\text{ V}, I_{OH} = -20\text{ }\mu\text{A}$ |              | 3.5                  |       |      | V             |
|           |  | $V_{CC} = 4.5\text{ V to }6\text{ V}, V_I = 0.75\text{ V}, I_{OH} = -3.2\text{ mA}$         |              | 2.5                  |       |      |               |
| $V_{OL}$  | Low-level output voltage                         | $V_{CC} = 4.5\text{ V to }6\text{ V}, V_I = 3\text{ V}, I_{OL} = 3.2\text{ mA}$             |              |                      |       | 0.4  | V             |
| $I_{IH}$  | High-level input current                         | See Figure 2  |              | $V_I = 25\text{ V}$  | 3.6   | 8.3  | mA            |
|           |  |   |              | $V_I = 3\text{ V}$   | 0.43  | 1    |               |
| $I_{IL}$  | Low-level input current                          | See Figure 2  |              | $V_I = -25\text{ V}$ | -3.6  | -8.3 | mA            |
|           |  |   |              | $V_I = -3\text{ V}$  | -0.43 | -1   |               |
| $I_{OS}$  | Short-circuit output current                     | See Figure 3  |              |                      |       | -35  | mA            |
| $I_{CC}$  | Supply current                                   | $V_I = 5\text{ V},$<br>See Figure 2   | No load,     |                      | 420   | 700  | $\mu\text{A}$ |

† All typical values are at  $T_A = 25^\circ\text{C}$ .

NOTE 3: All characteristics are measured with response control terminal open.

## switching characteristics, $V_{CC} = 5\text{ V} \pm 10\%$ , $T_A = 25^\circ\text{C}$

| PARAMETER  |   | TEST CONDITIONS  |  | MIN | TYP | MAX | UNIT          |               |
|------------|---|--|--|-----|-----|-----|---------------|---------------|
| $t_{PLH}$  | Propagation delay time, low- to high-level output | $R_L = 5\text{ k}\Omega, C_L = 50\text{ pF},$ See Figure 4 |  |     |     | 6   | $\mu\text{s}$ |               |
| $t_{PHL}$  | Propagation delay time, high- to low-level output |  |  |     |     | 6   | $\mu\text{s}$ |               |
| $t_{TLH}$  | Transition time, low- to high-level output‡       |  |  |     |     | 500 |               | ns            |
| $t_{THL}$  | Transition time, high- to low-level output‡       |  |  |     |     | 300 |               | ns            |
| $t_{w(N)}$ | Duration of longest pulse rejected as noise§      |  |  |     |     | 1   | 6             | $\mu\text{s}$ |

‡ Measured between 10% and 90% points of output waveform.

§ The receiver ignores any positive- or negative-going pulse that is less than the minimum value of  $t_{w(N)}$  and accepts any positive- or negative-going pulse greater than the maximum of  $t_{w(N)}$ .



# SN65C189, SN65C189A, SN75C189, SN75C189A QUADRUPLE LOW-POWER LINE RECEIVERS

SLLS041D – OCTOBER 1988 – REVISED MAY 1995

## PARAMETER MEASUREMENT INFORMATION†

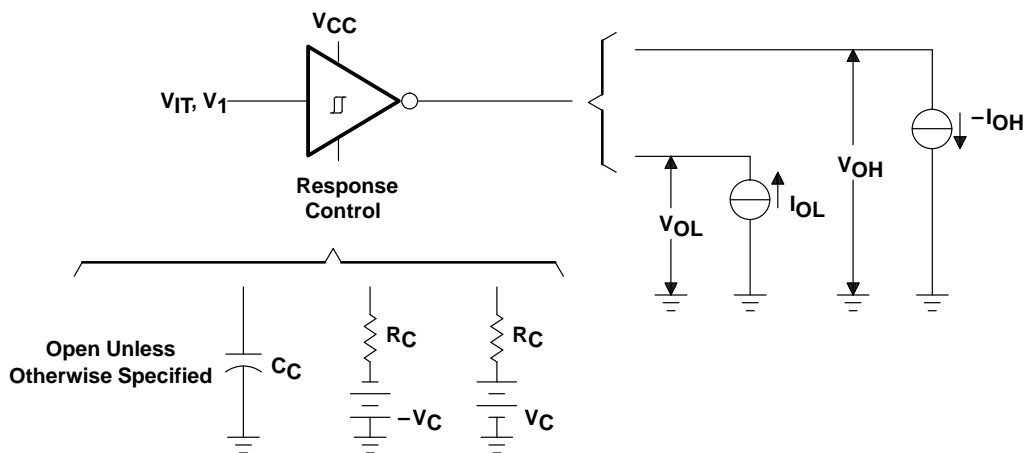


Figure 1.  $V_{T+}$ ,  $V_{IT-}$ ,  $V_{OH}$ ,  $V_{OL}$

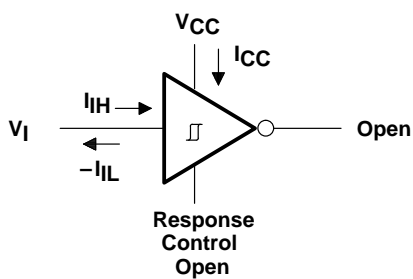


Figure 2.  $I_{IH}$ ,  $I_{IL}$ ,  $I_{CC}$


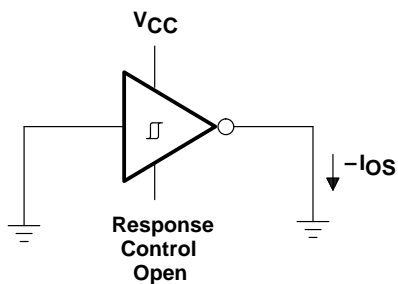



Figure 3.  $I_{OS}$

† Arrows indicate actual direction of current flow. Current into a terminal is a positive value.

PARAMETER MEASUREMENT INFORMATION

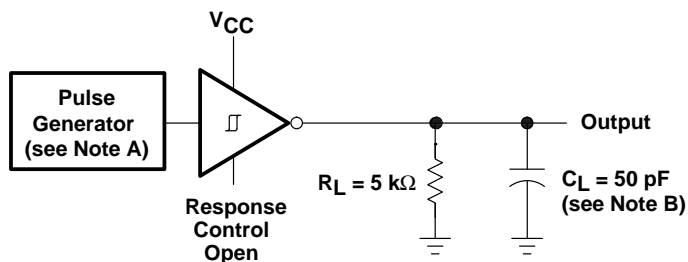

TEST CIRCUIT

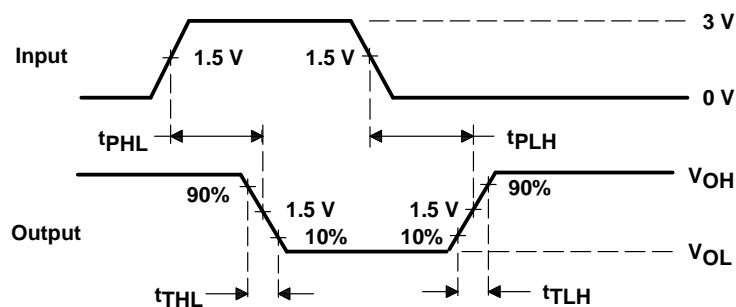

VOLTAGE WAVEFORMS





- NOTES: A. The pulse generator has the following characteristics:  $Z_O = 50 \Omega$ ,  $t_w = 25 \mu s$ .  
 B.  $C_L$  includes probe and jig capacitances.

Figure 4. Test Circuit and Voltage Waveforms

# SN65C189, SN65C189A, SN75C189, SN75C189A QUADRUPLE LOW-POWER LINE RECEIVERS

SLLS041D – OCTOBER 1988 – REVISED MAY 1995

## TYPICAL CHARACTERISTICS

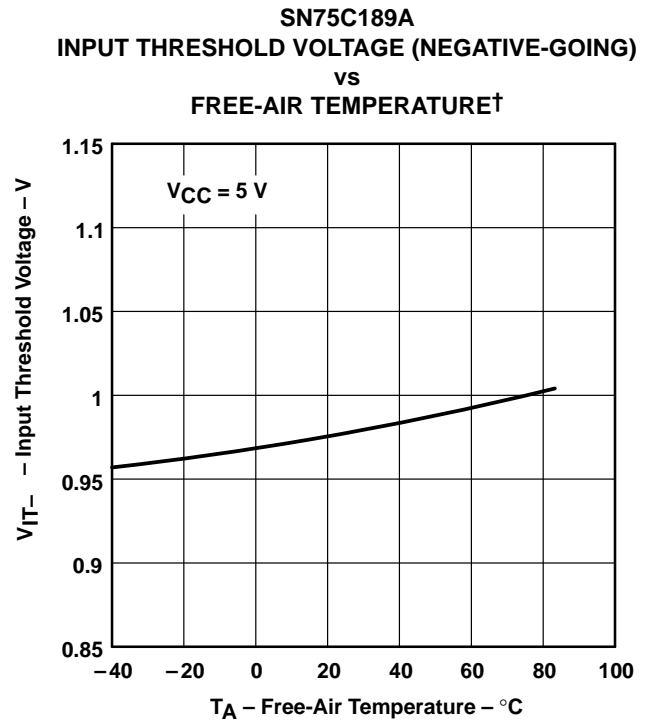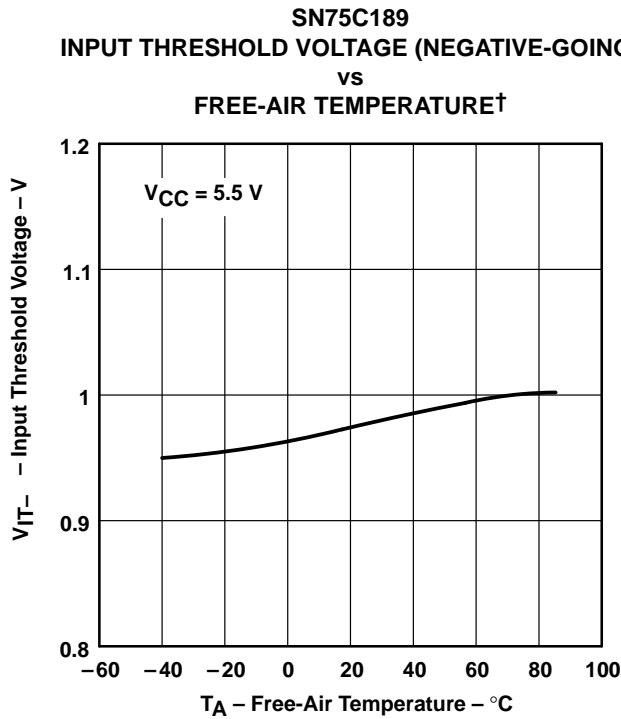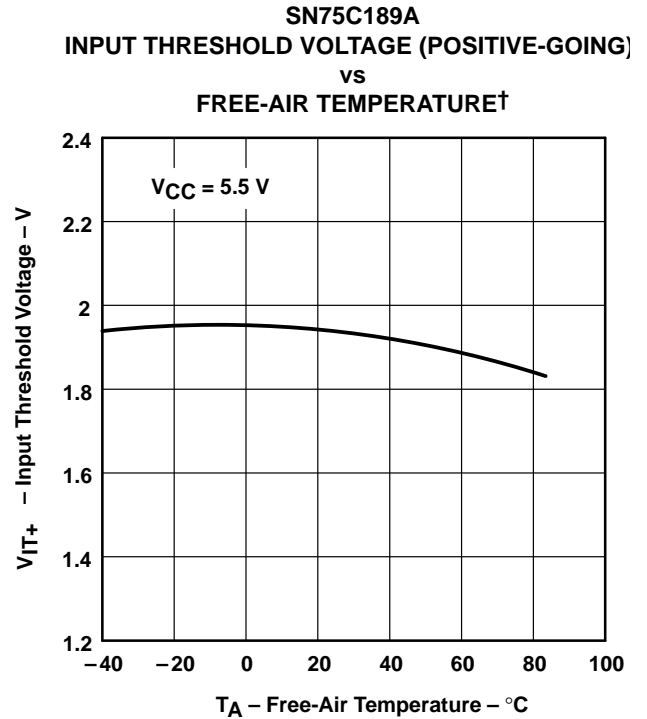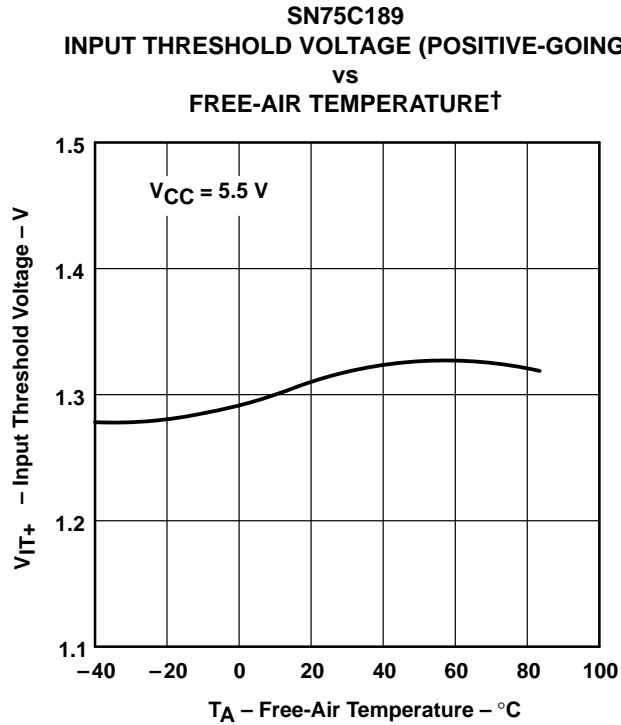

† Only the 0°C to 70°C portion of the curves applies to the SN75'.

TYPICAL CHARACTERISTICS

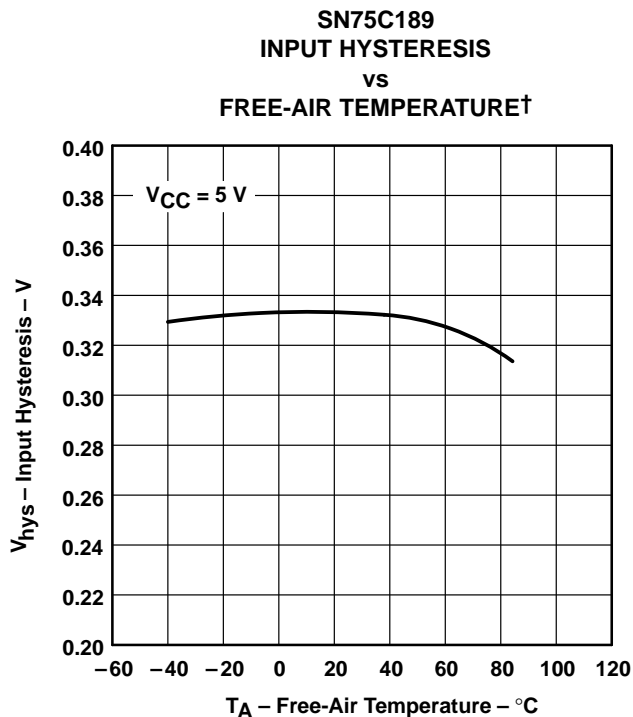


Figure 9

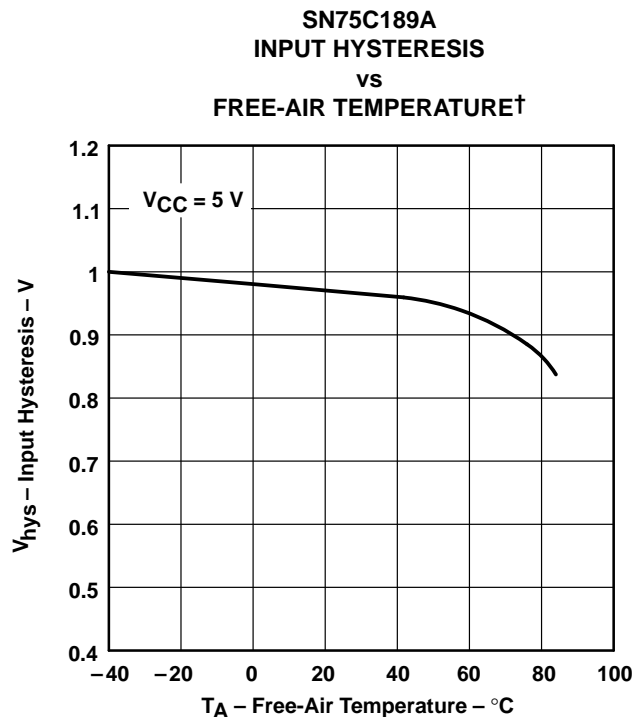


Figure 10

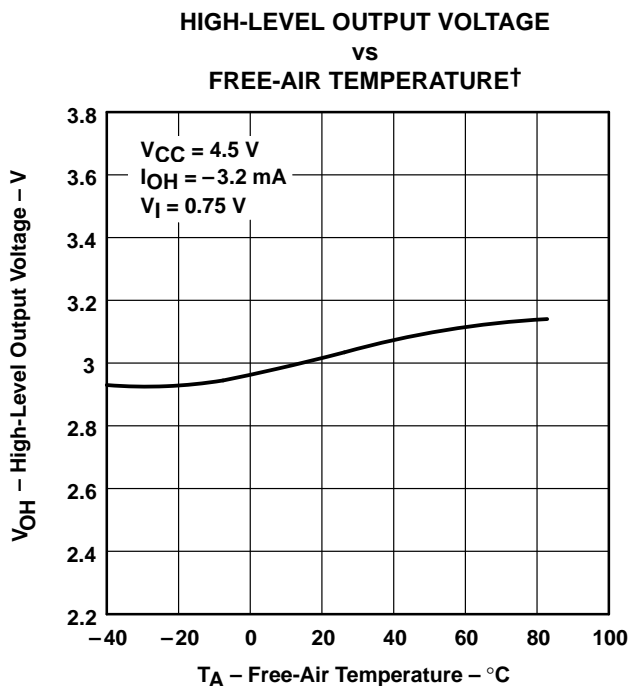


Figure 11

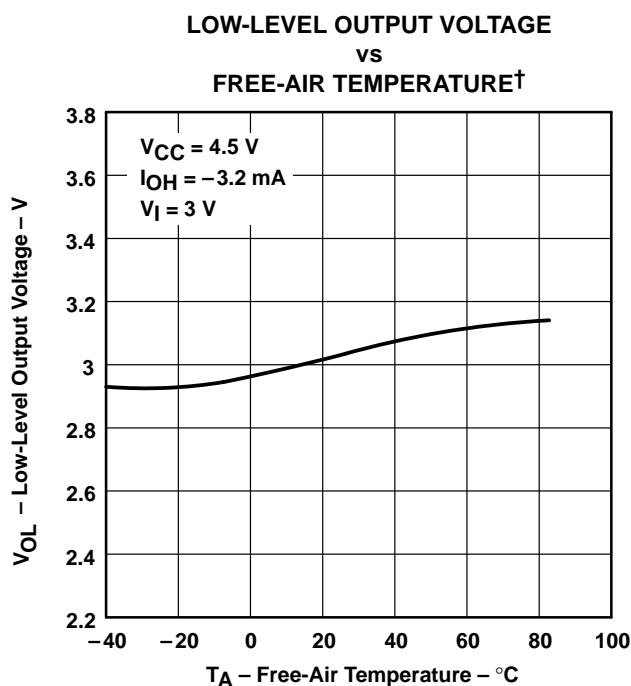


Figure 12

† Only the 0°C to 70°C portion of the curves applies to the SN75'.

# SN65C189, SN65C189A, SN75C189, SN75C189A QUADRUPLE LOW-POWER LINE RECEIVERS

SLLS041D – OCTOBER 1988 – REVISED MAY 1995

## TYPICAL CHARACTERISTICS

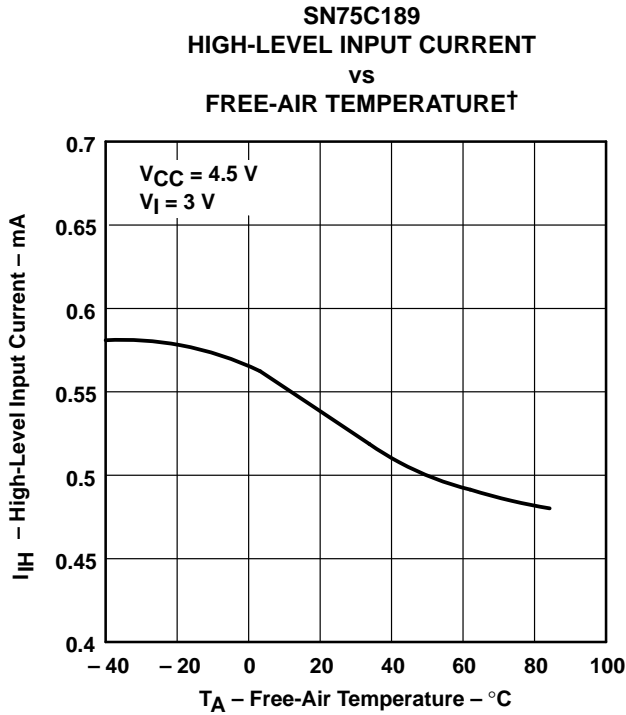


Figure 13

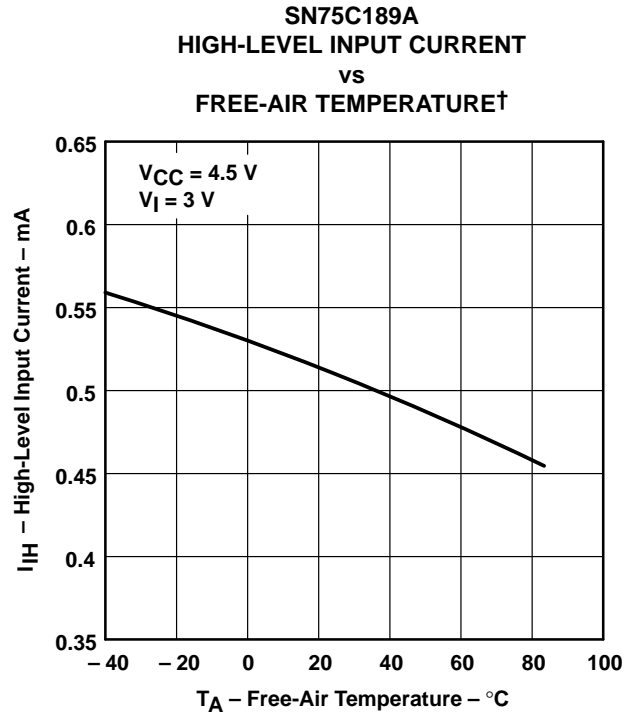


Figure 14

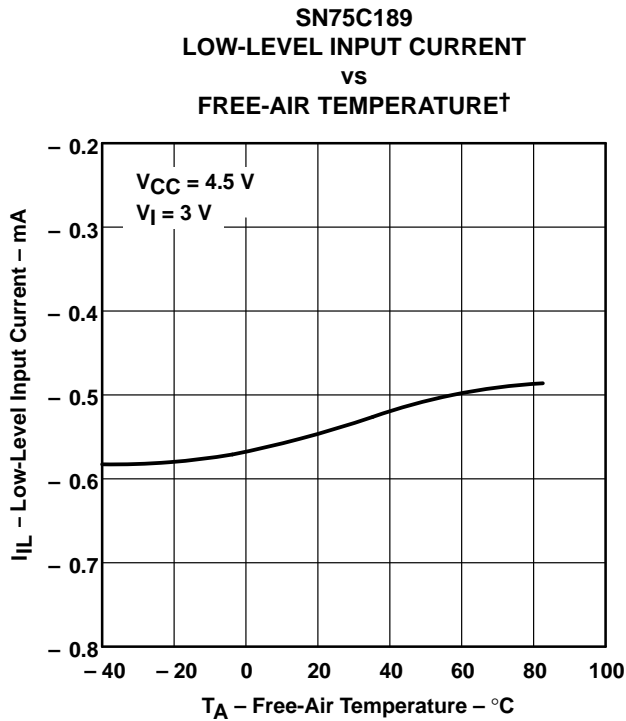


Figure 15

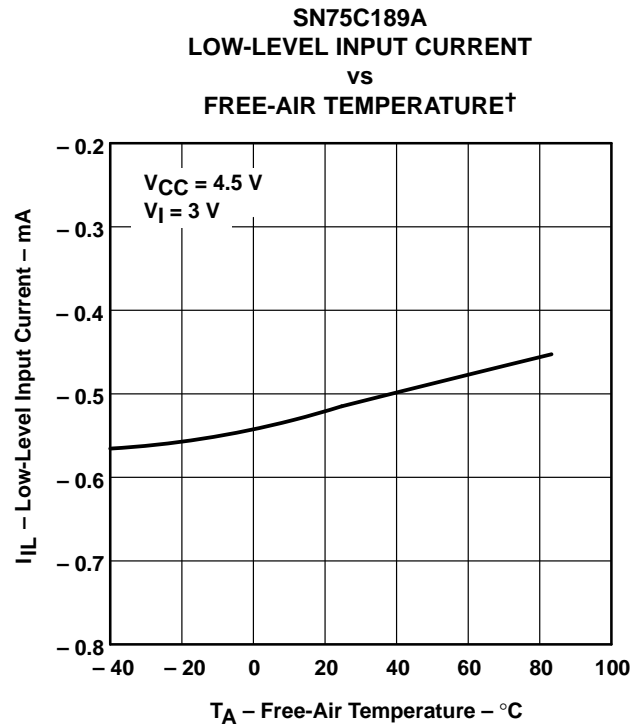


Figure 16

† Only the 0°C to 70°C portion of the curves applies to the SN75<sup>†</sup>.



TYPICAL CHARACTERISTICS

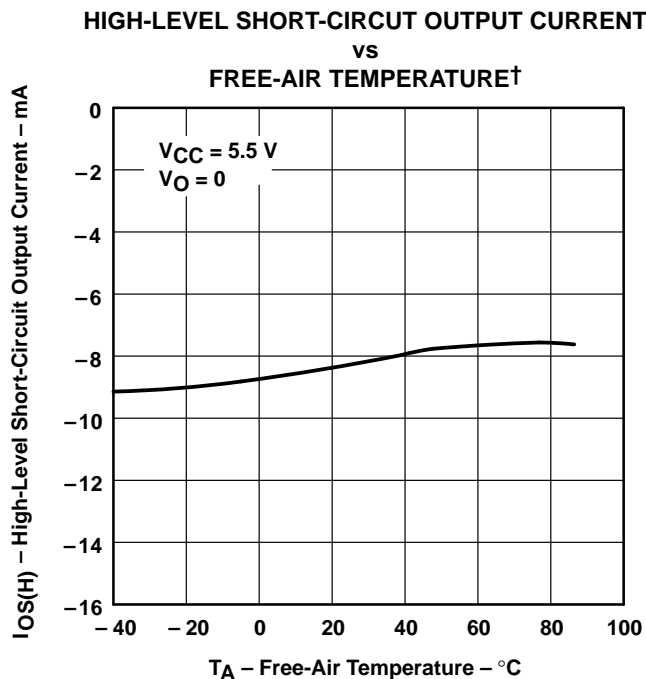


Figure 17

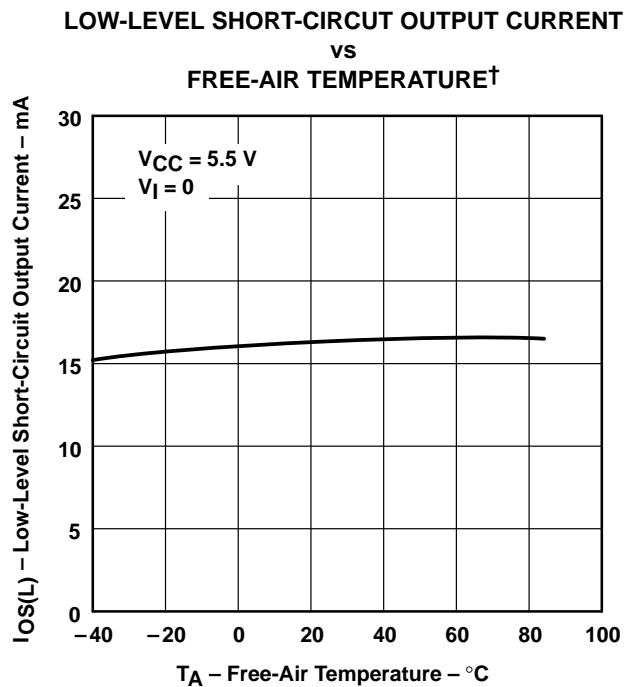


Figure 18

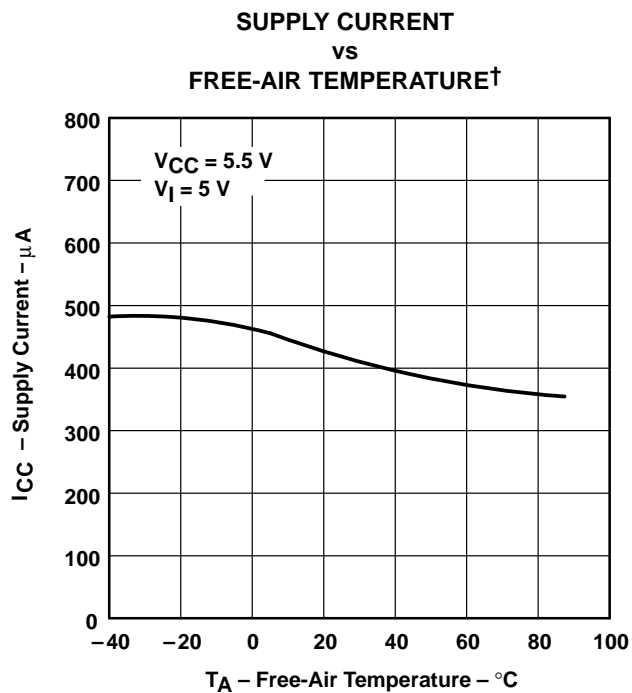


Figure 19

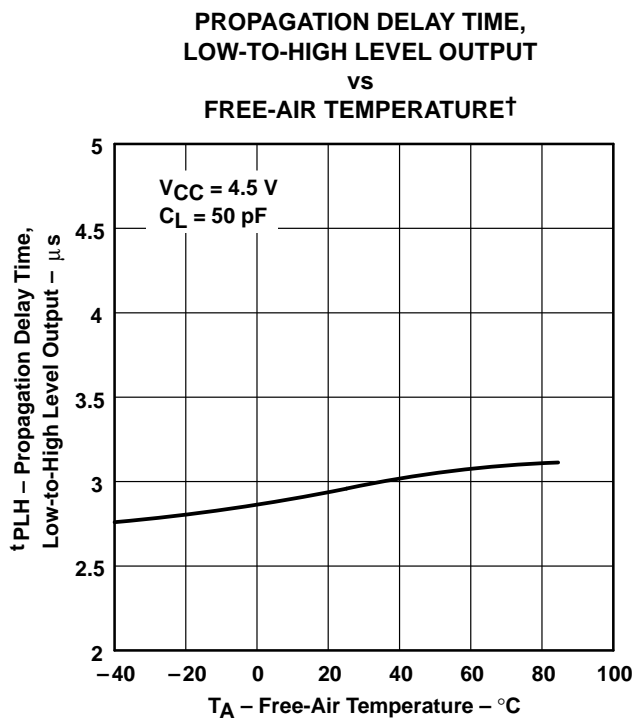


Figure 20

† Only the 0°C to 70°C portion of the curves applies to the SN75<sup>5</sup>.

# SN65C189, SN65C189A, SN75C189, SN75C189A QUADRUPLE LOW-POWER LINE RECEIVERS

SLLS041D – OCTOBER 1988 – REVISED MAY 1995

## TYPICAL CHARACTERISTICS

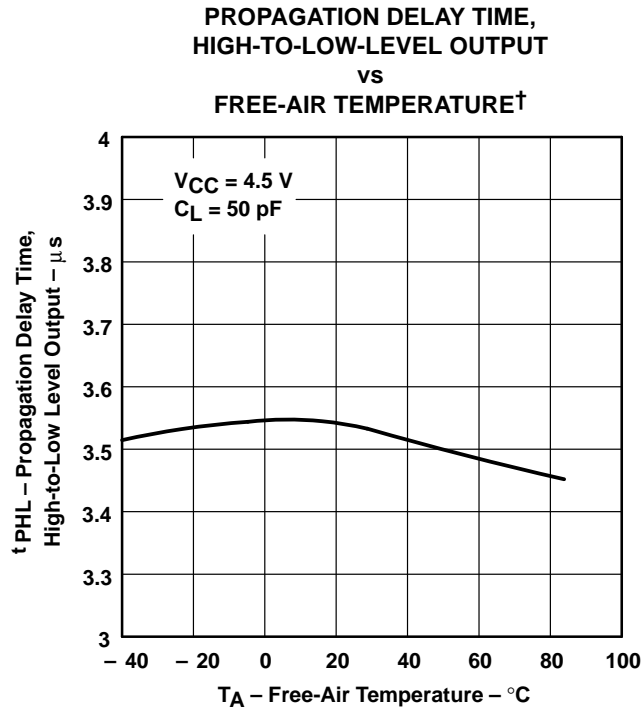


Figure 21

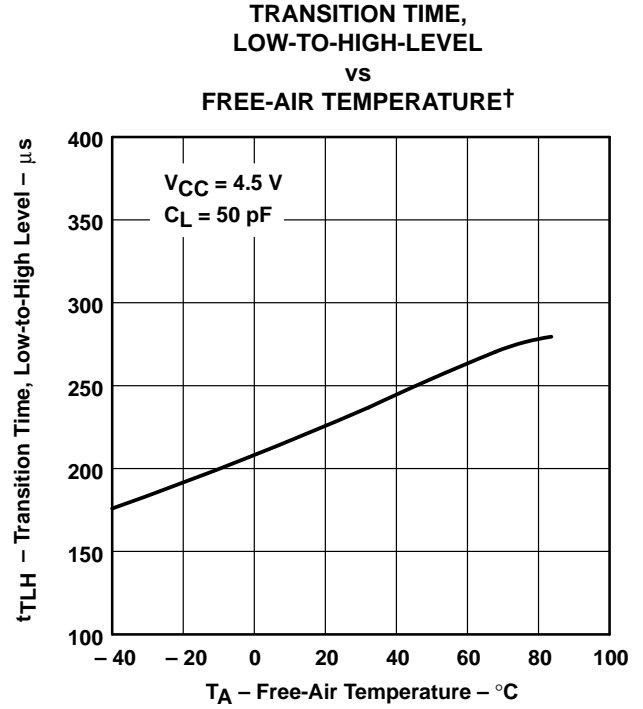


Figure 22

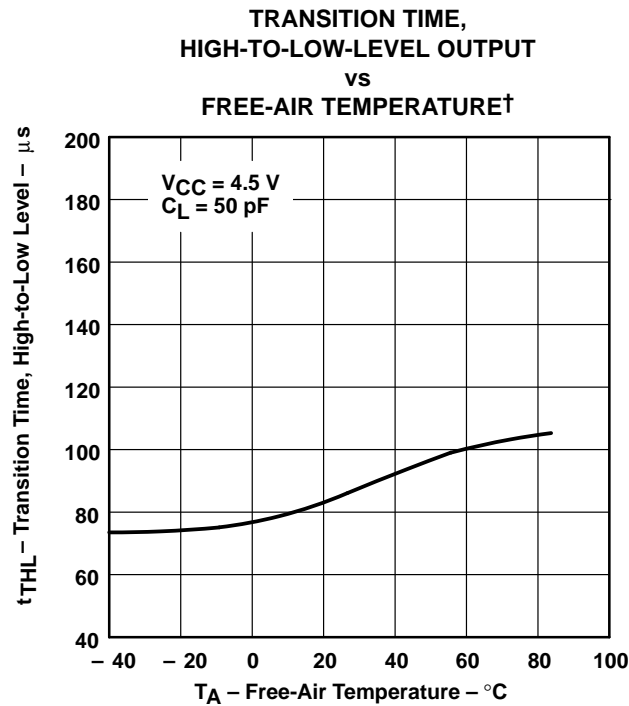


Figure 23

† Only the 0°C to 70°C portion of the curves applies to the SN75<sup>1</sup>.

## **IMPORTANT NOTICE**

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

**TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.**

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.